

REQUEST FOR OFFER: BELT CONVEYORS AND ROLLER TRACKS

Standard dimension

Axial distance A mm

Belt width L mm


Conditions of usage

Goods to be conveyed

Weight/piece kg

Total belt load kg

Temperature °C

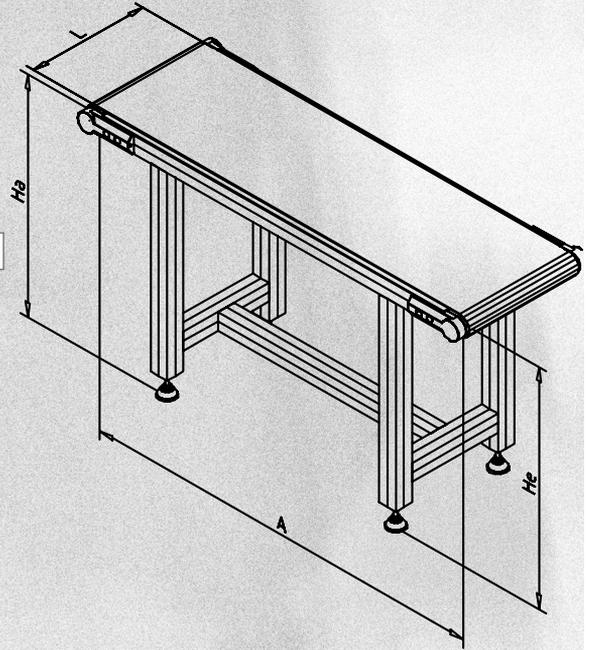

Subconstruction

Charging side height He mm

Discharging side height Ha mm

Number of supports Pcs.

Height adjustable sup. from mm to mm

No. of lateral guide support Pcs. (max. distance: 1000 mm)

Lateral guide one side both sides

Floor anchor Yes No

Rollers Yes No

Feet Yes No

Options

Belt PVC PU

Supporting sheet Aluminium Inox

Drive

Motor arrangement Flanged Plug-on motor

Motor Type Part no.

Speed m/min.

Adjustable speed from m/min. up to m/min.

Company

Please call me back

Name

Please send me an offer

Phone no.

Fax no.